




CHEMISTRY BETWEEN US

PL 44-190 Knurów, ul. Przemysłowa 22, phone: +48 32 335 79 00, e-mail: firma@aibsc.com.pl

Integra Kompri

Integra Kompri – self-expanding, open cell, impregnated tape based on polyurethane foam. The product is coated with an acrylic adhesive on one side. It does not contain plasticizers. It is supplied in the form of compressed rolls in bulk packaging. This type of tape is most commonly used as a seal between the window and the jamb. It is used in particular for renovations and repairs, when the window opening is already plastered. Integra Kompri is offered in three classes: BG1, BG2 and DB.

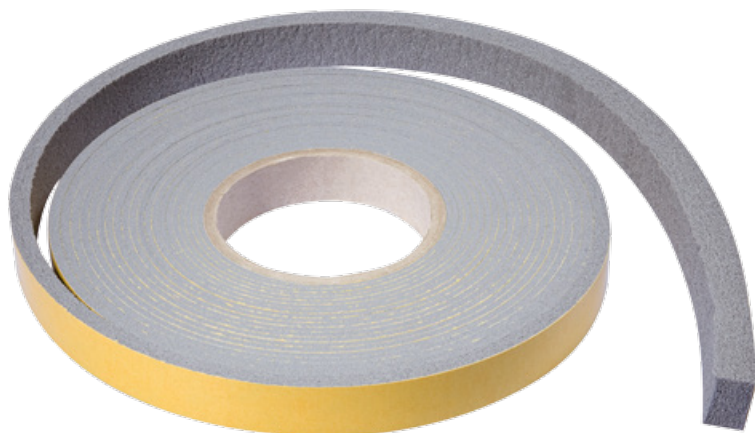

Specifications – Integra Kompri BG1

Property	Standard	Results
Density		120 kg/m ³
Water tightness	EN 86	no leaks at 600 Pa
Flammability class	DIN 4102	B1
Tensile strength		170 kPa
Tear strength		170%
Air permeability	EN 42	≤ 0,01 m ³ /h * m * [daPa]n
Temperature resistance		-40°C to +100°C [+130°C for a short period of time]

Dimensions

Size	Joint	Thickness	m/roll	rolls/box	m/box
10/2	2 - 3 mm	10 mm	12,5	30	375
15/3	3 - 4 mm	15 mm	10	20	200
15/6	6 - 9 mm	30 mm	5,6	20	112
20/4	4 - 6 mm	20 mm	8	15	120
20/6	6 - 9 mm	30 mm	5,6	15	84

Specifications – Integra Kompri BG2

Property	Standard	Results
Density		80 kg/m ³
Water tightness	EN 86	no leaks at 300 Pa
Flammability class	DIN 4102	B1
Tensile strength		170 kPa
Tear strength		170%
Air permeability	EN 42	≤ 0,01 m ³ /h * m * [daPa] ⁿ
Temperature resistance		-40°C to +100°C [+130°C for a short period of time]

Dimensions

Size	Joint mm	Thickness mm	m/roll	rolls/box	m/box
10/2	2 - 3	10	12,5	30	375
10/3	3 - 4	15	10	30	300
10/4	4 - 6	20	8	30	240
15/2	2 - 3	10	12,5	20	250
15/3	3 - 4	15	10	20	200
15/4	4 - 6	20	8	20	160
15/6	6 - 9	30	5,6	20	112
15/8	8 - 12	40	4,3	20	86
20/4	4 - 6	20	8	15	120
20/6	6 - 9	30	5,6	15	86
30/12	12 - 20	60	2,6	10	26

Specifications – Integra Kompri DB

Property	Standard	Results
Density		50 kg/m ³
Water tightness	EN 86	no leaks at 300 Pa
Flammability class	DIN 4102	B1
Tensile strength		155 kPa
Tear strength		170%
Air permeability	EN 42	≤ 0,01 m ³ /h * m * [daPa]n
Temperature resistance		-40°C to +100°C [+130°C for a short period of time]

Dimensions

Size	Joint mm	Thickness mm	m/roll	rolls/box	m/box
10/2-3	2 - 3	10	12,5	30	375
10/3-4	3 - 4	15	20	30	600
15/3-4	3 - 4	15	20	30	600
15/3-7	3 - 7	20	15	20	300
15/5-8	5 - 8	25	12	20	240
15/5-10	5 - 10	30	10	20	200
20/5-10	5 - 10	30	10	15	150
20/7-12	7 - 12	40	8	15	120
20/10-16	10 - 16	50	6	15	90